DRAWING NO
C0923

3RD ANGLE PROJECTION

REMOVE ALL SHARP EDGES AND BURRS

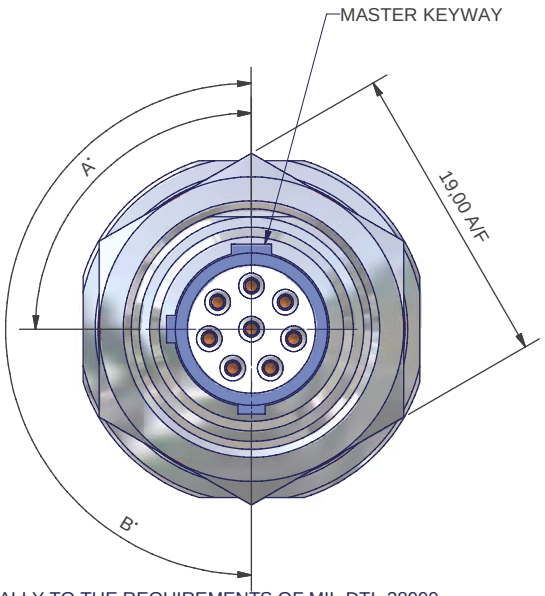

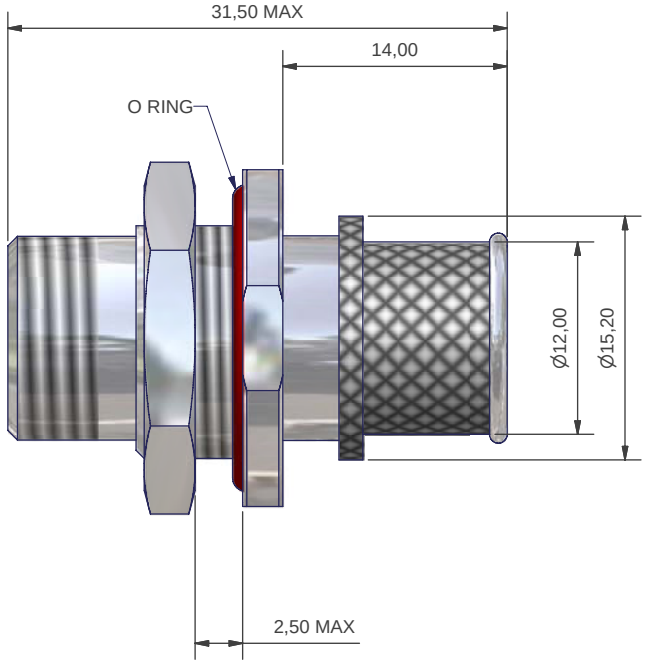

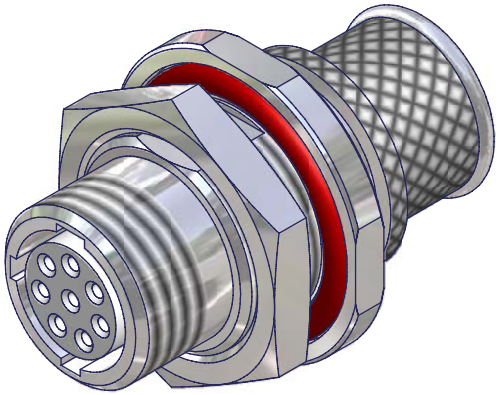

NOTES
GENERALLY TO THE REQUIREMENTS OF MIL-DTL-38999
MATERIAL AND FINISH
SEE DATA SHEET FOR SHELL MATERIAL AND FINISH
ALL PARTS ROHS COMPLIANT
MATERIALS
SEALS - SILICONE
CONTACTS - COPPER WITH GOLD OVER NICKEL PLATING
UL RATING (FLAMABILITY)
RIGID INSERT - V-0/5VA
SEALS - HB
POTTING - V-1

PERFORMANCE
VOLTAGE BREAKDOWN 1800V @ SEA LEVEL
CURRENT RATING
SIZE 16 13 AMPS MAX
SIZE 20 7 AMPS MAX
SIZE 22 3 AMPS MAS
TEMPERATURE RATING

-65˚C TO +200˚C

ALTERNATE KEYING	A DEG	B DEG
N	-	-
A	90	180
B	180	270
C	90	270

PH7028SAC00

- SERIES
- SHELL SIZE
- PLAN FORM
- CONTACT STYLE
- ALTERNATE KEYING
- MATERIAL + FINISH
- MODIFIER (OPTIONAL)

DESIGNED AND MANUFACTURED FOR PROTECH

ISSUE	DCR NO.	DATE	APPROVED
D		11/04/2006	P.L

MATERIAL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS IN MILLIMETRES
TOLERANCE ON DIMENSIONS +/-0.1MM
TOLERANCE ON ANGLES +/- 1 DEGREE

WEIGHT
DRAWN M.PAUL

DO NOT SCALE THIS DRAWING

THIS DRAWING IS COPYRIGHT, AND THE PROPERTY OF POLAMCO LTD. IT MUST NOT BE COPIED, USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY.

POLAMCO LTD
WESTON LOCK
LOWER BRISTOL ROAD
BATH BA2 1EP

TITLE

JAM NUT RECPETACLE

PART NO PH7028*****

ASSY USED ON

DRAWING NO C0923